


Product Name :
J Ring Apparatus

Product Code :
ASTConcrete-0020

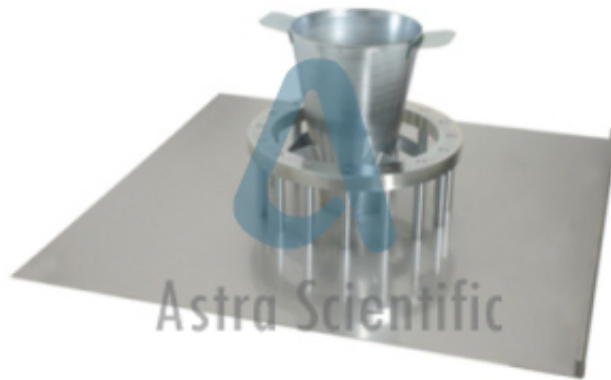

Description :

J Ring Apparatus

Technical Specification :

General Properties:

The J-ring test can be used to determine the passing ability of self-consolidating concrete. It is applicable for laboratory use in testing different concrete mixtures for passing ability or can be used in the field as a quality control test. It is typical to also perform a slump flow test with the J-ring test. This test is similar to the J-ring except the J-ring is not used. The difference between the results of the two tests provides an indicator of the passing ability of the concrete. Designed for durability, J-ring set includes a slump cone, J-ring with smooth or rebar rods and steel base plate with engraved positioning rings.

The J-Ring test is used for determining the passing ability, the flow spread and the flow time of self compacting concrete as the concrete flows through the JRing apparatus. The J-Ring narrow gap with $\varnothing 18$ mm x 16 smooth bars is manufactured from stainless steel. The Slump Cone is made from sheet steel protected against corrosion, with diameters; top 100 mm, base 200 mm and with a height of 300 mm. The Base plate is 900x900x3 mm square, made of stainless steel with engraved circles of

200 mm and 500 mm diameter conforming to EN 12350- 8. The Steel weighted collar is used to stabilize the slump cone on J-Ring or slump flow tests. Minimum apparatus for the J-Ring test are J-Ring with narrow gap and slump cone.



Astra Scientific

www.astrascientific.com, **Email:** info@astrascientific.com

Address: K-88, 20th Street, Annanagar, Chennai, India – 600040 **Phone:** +91-8860605265